
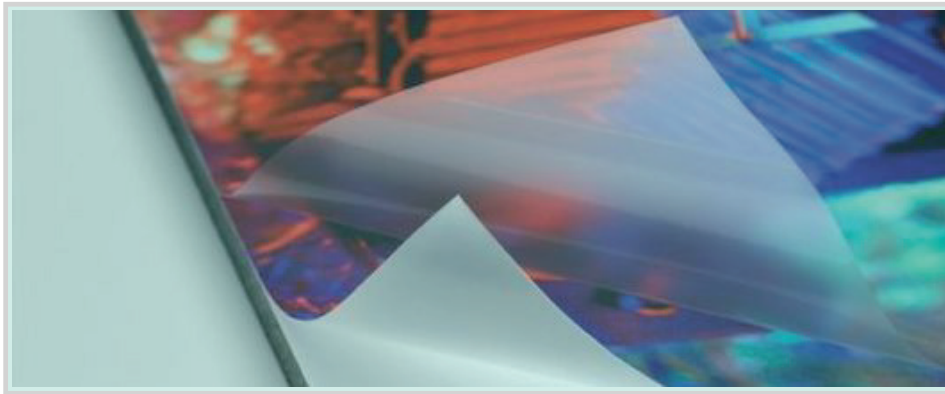


DATA SHEET

MON3164PR

MONOMERIC ADHESIVE WITH PROTECTIVE FOIL

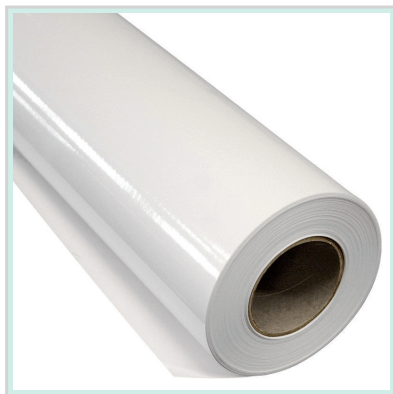

FILM DESCRIPTION AND LAMINATION

White soft PVC film with a glossy finish and a transparent soft PVC lamination with a matt finish.
Permanent, transparent, scratch-resistant polyacrylate adhesive.
This material is suitable for internal advertising, bright and intense in colour.

TECHNICAL DATA

Thickness	0,100 mm. (film)+ 0,100 mm. (foil).
Dimensional stability (FINATTM 14)	Applied to steel, no measurable shrinkage in transverse direction, in longitudinal direction maximum of 0.4 mm
Thermostability	Applied to aluminum, from -40° C to +80° C, no alteration.
Resistance to salinity of sea water (DIN 50021)	Applied on aluminium, after 100h/23° C no alteration.
Adhesive power (FINAT TM 1, after 24h, stainless steel)	16N/25mm.
Tear resistance (DIN EN ISO 527)	Length: min. 19 MPa Height: min. 19 MPa
Tear elongation (DIN EN ISO 527)	Length: min. 130% Height: min. 150%
Application temperature	> +10° C
Minimum duration subject to perfect workmanship	4 years
INTENDED USE	Usò interno.
MEASURES	Larghezza massima 1370 mm.
CERTIFICATIONS	Certificazione Qualità ISO 9001:2015 rilasciata dal TOV Italia S.r.l.