


DATA SHEET

MON3164NN

MONOMERIC ADHESIVE

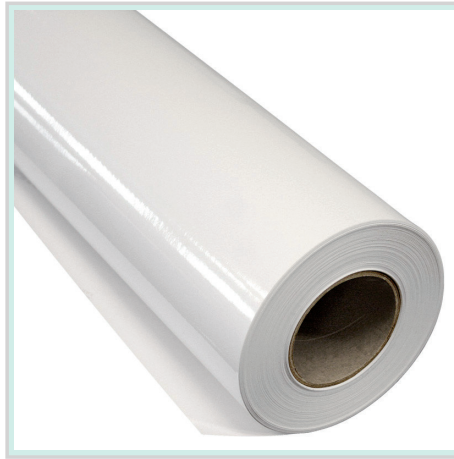

DESCRIPTION

Pellicola in PVC morbido bianco lucido.
 Adesivo poliacrilato, permanente, trasparente.
 Questo materiale si adatta alla pubblicità esterna a breve e media durata, brillante e intensa di colori.
 Stampa a inchiostri Latex.

TECHNICAL DATA

Thickness	0,100 mm.
Dimensional stability (FINAT TM 14)	Applied to steel, no measurable shrinkage in transverse direction, in longitudinal direction maximum of 0.4 mm
Thermostability	Applied on aluminium, from -40° C to +80° C, no alteration.
Resistance to salinity of sea water (DIN 50021)	Applied on aluminium, after 100h/23° C no alteration
Adhesive power (FINAT TM 1, after 24h, stainless steel)	16 N/25 mm.
Tear resistance (DIN EN ISO 527)	Length: min.19 MPa Height: min.19 MPa
Tear elongation (DIN EN ISO 527)	Length: min.130% Height: min.150%
Application temperature	> +10°C
Durata minima subordinata ad una lavorazione a perfetta regola d'arte	4anni
Intended use	Internal use

MEASURES Maximum width 1370 mm.

CERTIFICATIONS ISO 9001:2015 Quality Certification issued by TOV Italia S.r.l.

MPS reserves the right to make any changes deemed necessary to improve the products without prior notice.